


10/27/00



10-30-00

A

 JCS26 U.S. PTO
 09/699312
 10/27/00

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 CFR 1.53(b))	<i>Title of Invention</i>	Interconnect System and Method for Multiple Protocol Short Message Services
	<i>Named Inventor(s)</i>	Edward I. Comer and Jere Sandidge
	<i>Attorney Docket</i>	214105
	<i>Express Mail Label No.</i>	EL561435968US

APPLICATION ELEMENTS		Assistant Commissioner for Patents ADDRESS TO: Box Patent Application Washington, D.C. 20231			
1. <input type="checkbox"/> Fee Transmittal Form (Submit an original, and a duplicate for fee processing) 2. <input checked="" type="checkbox"/> Application claims Small Entity status 3. <input checked="" type="checkbox"/> Specification, Claims, and Abstract Total Pages 26 4. <input checked="" type="checkbox"/> Drawings Total Sheets 4 5. Oath or Declaration Total Pages a. <input type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 16 completed) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 5b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein. (i) <input type="checkbox"/> <u>DELETION OF INVENTOR(S)</u> Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b). 6. <input type="checkbox"/> Microfiche Computer Program (Appendix)		ACCOMPANYING APPLICATION PARTS 7. <input type="checkbox"/> Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies 8. <input type="checkbox"/> Assignment: a. <input type="checkbox"/> Assignment Papers (cover sheet & document(s)) b. <input type="checkbox"/> Assignment is of record in parent application No. _____ 9. <input type="checkbox"/> 37 CFR 3.73(b) Statement (when there is an assignee) <input type="checkbox"/> Power of Attorney by assignee 10. <input type="checkbox"/> English Translation Document (if applicable) 11. <input type="checkbox"/> Information Disclosure Statement (IDS) PTO-1449 <input type="checkbox"/> Copies of IDS Citations 12. <input type="checkbox"/> Preliminary Amendment 13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized) 14. <input type="checkbox"/> Certified Copy of Priority Document(s) 15. <input type="checkbox"/> Other: _____			
16. If a CONTINUING APPLICATION , check appropriate box and supply the requisite information: <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application No: _____ Recite complete dependency back to first parent application: _____					
17. CORRESPONDENCE ADDRESS: <table> <tr> <td> Brenda O. Holmes, Esq. KILPATRICK STOCKTON LLP 2400 Monarch Tower 3424 Peachtree Road, N.E. Atlanta, Georgia 30326 </td> <td> By: <u>Brenda O. Holmes</u> Reg. No. 40,339 Date: October 27, 2000 Telephone: 404-949-2400 Facsimile: 404-949-2499 </td> </tr> </table>				Brenda O. Holmes, Esq. KILPATRICK STOCKTON LLP 2400 Monarch Tower 3424 Peachtree Road, N.E. Atlanta, Georgia 30326	By: <u>Brenda O. Holmes</u> Reg. No. 40,339 Date: October 27, 2000 Telephone: 404-949-2400 Facsimile: 404-949-2499
Brenda O. Holmes, Esq. KILPATRICK STOCKTON LLP 2400 Monarch Tower 3424 Peachtree Road, N.E. Atlanta, Georgia 30326	By: <u>Brenda O. Holmes</u> Reg. No. 40,339 Date: October 27, 2000 Telephone: 404-949-2400 Facsimile: 404-949-2499				

09699312 10/27/00

5

10

INTERCONNECT SYSTEM AND METHOD FOR MULTIPLE PROTOCOL SHORT MESSAGE SERVICES

15

FIELD OF THE INVENTION

20

The present invention relates to the exchange of short messages between a central location and a remote location, and more particularly to identifying the recipient of each short message, identifying the data format expected by the recipient of the short message and converting the received short message to the identified data format.

BACKGROUND OF THE INVENTION

25

Short Message Service (SMS) is an inherent capability of most digital wireless telecommunications systems. The radio technologies associated with each of the digital wireless telecommunications system's are technically incompatible at the radio signal layer, but most are compatible at the intersystem SS7 transport layer. Currently, the differing RF technologies, e.g., time

006934.0000

5

10

20

The format converter reformats the data formatted in the X.50 standard into the ISDN format. The format converter accomplishes the conversion by storing the incoming X.50 data in an aligned data RAM with offsets, to provide an appropriate

alignment among the frames of the data. Then, a format conversion module reformats the data into the ISDN format one byte at a time.

In another network, a subscriber in an electronic messaging network can access messages in a variety of formats. A subscriber may receive messages through a variety of types of equipment, such as a voice mail system, an e-mail system, a facsimile machine and a telephone, all connected to a wireline network. The subscriber may access these messages through a pager, a cellular telephone, or a personal digital assistant, each connected to a different wireless network. The subscriber selects the wireline or wireless network and media format to be used for delivering messages or notifying a subscriber that a message has been received.

For example, the subscriber may elect to have notification of a voice mail or facsimile receipt directed to the personal digital assistant (PDA) in the form of an e-mail message. In accordance with the method of the network, the subscriber's selection is implemented through the personal intercommunications inter-networking system, which performs the appropriate data conversion from one protocol to another and delivers the e-mail message.

In yet another network, an intelligent signaling transfer point (ISTP) is included in a telephone network with a database for storing call processing control information. Calls from one station on the network to another are either passed through or intercepted at the ISTP and screened in accordance with criteria stored in the database, such as time of day, a certain originating area or caller, or a specified call count value.

In still another network, a data collection device is provided for use with *any one of* the following: TDMA; CDMA; frequency division multiple access (FDMA); GSM; and personal access communications systems (PACS) technologies. But, the data
5 collection device does not use multiple such technologies in a single system.

Thus, there is a need for a system in which a central location can communicate with several remote stations, which use different digital cellular or personal communications system (PCS)
10 formats. The systems and methods discussed above only teach conversion between two specific formats.

SUMMARY OF THE INVENTION

The present invention meets the needs described above
15 by providing a system and method for interconnecting digital cellular systems of multiple formats so that a customer central location (CCL) can send short messages to, or receive short messages from, multiple remote locations using different digital cellular or PCS standards. A short message arbitrator (SMA)
20 intercepts a communication from the CCL to a remote location. The SMA retrieves information sent with the communication, such as the mobile identification number (MIN) or other identifying characteristic. The SMA uses the identifying characteristic to determine the mobile switching center (MSC) serving the remote
25 location, the wireless access method used in the MSC's market, the CCL's class of service and the type of transport to be used between the SMA and the MSC. Based on the information retrieved from the database, the SMA determines whether the communication needs to be converted. If the communication needs to be converted, then

002207-21E65960

The SMA also intercepts a communication from a remote location to the CCL. The SMA retrieves information sent with the communication, such as the MIN and MSC identifier, or other identifying characteristic. The SMA uses the identifying characteristic to determine the recipient of the communication, in this case the CCL, and the class of service expected by the recipient. The SMA also uses the information stored in the database to determine whether the communication should be converted. If the communication should be converted, then the SMA performs the conversion and sends the communication to the CCL.

It is another object of the invention to provide a system and method for allowing a CCL to exchange short messages with such remote locations.

It is still a further object of this invention to provide a method for integrating with and supporting all of the currently

popular digital cellular systems, simultaneously, thus reducing deployment costs for cellular carriers.

It is yet another object of this invention to permit sending SMS messages originated in one type of cellular system to another dissimilar cellular system in a transparent manner.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of an interconnect system according to an exemplary embodiment of the present invention.

FIG. 2 is a block diagram of an exemplary short message arbitrator of the system of FIG. 1.

FIG. 3 is a flow diagram illustrating an exemplary communications method used by the CCL to transmit data to the remote locations.

FIG. 4 is a flow diagram illustrating an exemplary communications method used by the remote locations to transmit data to the CCL.

DETAILED DESCRIPTION

The present invention is directed to a system and method for interconnecting digital cellular systems of multiple formats so that a customer central location (CCL) can send short messages to, or receive short messages from, multiple remote locations using different digital cellular or PCS standards. Briefly described, a short message arbitrator (SMA) intercepts a communication between the CCL and the remote locations. The SMA retrieves information sent with the communication, such as the mobile identification number (MIN) or other identifying characteristic. The information is used to search a database to

determine the data format used by the sender and expected by the recipient. Based upon the information retrieved from the database, the SMA determines whether the communication should be converted. If the communication should be converted, then the
 5 SMA converts the communication and transmits the communication to the intended recipient over the appropriate transmission path.

Exemplary System Architecture

FIG. 1 shows an exemplary system for providing a
 10 flexible bi-directional data transport between a CCL 100 and one or more remote locations using wireless technologies. The CCL 100 sends and receives data to and from remote locations 123, 124, 125 and 126. Data from the CCL 100 is transferred to the SMA 104 using a public voice/data transport 102 over data circuits 101 and
 15 103.

The SMA 104 converts the CCL's data to the proper format for transport to MSC's 109, 110, 117 and 119. The SMA 104 utilizes two routes for delivering the CCL's data to MSC's 109, 110, 117, and 119. The SMA 104 routes the CCL's data to one of
 20 the MSC's 109, 110, 117, and 119 by: 1) using a data circuit 105 to an SS7/IS41 Network 106, then over a data circuit (107, 108, 115 or 116) to the MSC (109, 110, 117, or 119) that is intended to receive the transmitted data; or 2) using a data circuit 103 back to the public voice/data transport 102, then over a data circuit (111,
 25 112, 118, or 120) to the MSC (109, 110, 117, or 119) that is intended to receive the transmitted data.

Depending on the wireless access method used at the remote location, the CCL's data is routed to the selected wireless market. For advanced mobile phone service (AMPS) wireless
 30 communications, the data is transported from the MSC 109 to an

AMPS radio 113 and finally to the remote location 123. For time division multiple access (TDMA) wireless communications, the data is transported from the MSC 117 to a TDMA radio 121 and finally to the remote location 125. For code division multiple access (CDMA) wireless communications, the data is transported from the MSC 119 to a CDMA radio 122 and finally to the remote location 126. For global system for mobile telecommunications (GSM), the data is transported from the MSC 110 to a GSM radio 114 and finally to the remote location 124.

10 The system of FIG. 1 provides for the bi-directional transport of data between a CCL 100 and its remote locations (123, 124, 125, or 126) using a wireless link (Cellular or PCS). The CCL 100 can use one or more methods to deliver data to the SMA 104. The various methods employ a variety of communication system components. Below are four examples:

- 15 1) a dial-up data connection via a voice circuit 101 to the public voice/data transport 102 (public switched telephone network), then over the voice circuit 103;
- 2) a dial-up or dedicated data circuit 101 to the public voice/data transport 102 (Internet) then over the data circuit 103;
- 20 3) a dedicated data circuit 101 to public voice/data transport 102 (frame-relay private network) then over the data circuit 103; and
- 4) an ISDN circuit 101 to public voice/data transport 102 (public switched telephone network), then over the ISDN circuit 103.
- 25

After the SMA 104 receives the data from the CCL 100, it uses an identifying characteristic, such as the mobile identification number (MIN) or international mobile station

identifier (IMSI), that was received with the data, to retrieve the CCL's profile 130 from a SMA database 128. The SMA determines the following from the CCL profile: 1) the MSC (109, 110, 117, or 119) serving the remote radio (113, 114, 121 or 122); 2) the wireless access method used in the MSC's market; 3) the CCL's class of service; and 4) the type of transport to use between the SMA 104 and the selected MSC (109, 110, 117, or 119). Based upon the information retrieved from the database, the SMA determines whether any alterations are required to the data or identifying characteristic to make the data compatible with a technologically dissimilar receiving unit or system.

The CCL's class of service may include one of the following: "CELLEMETRY" data service; short message system (SMS); asynchronous digital data; or data over circuit switched voice cellular. "CELLEMETRY" data service is available to AMPS (analog and digital) radios, SMS and asynchronous digital data are available to digital radios (CDMA, GSM and TDMA), and circuit switched voice cellular is available in all methods of wireless access. In addition, those skilled in the art will appreciate that other classes of service may be used with the CCL 100 of the present invention.

For simplicity only one CCL 100 is illustrated in FIG. 1. However, the SMA can support multiple CCL's. Each CCL served by the SMA has a CCL identifier that is stored in the database.

FIG. 2 shows an exemplary SMA 104 of the present invention. The controller 201 manages communication over the data circuits 103 and 105. The SMA database 128 (FIG. 1) stores a profile for each CCL 100 supported by the SMA 104. The profile provides information to support the conversion and transport of

data between a central location, such as CCL 100, and its remote locations, such as remote locations 123, 124, 125, and 126. From the stored profiles the SMA determines the recipient of the communication, as well as the method of data transport and any data conversions that are necessary.

The SMA analyzes the information about the CCL and the remote device stored in the database to determine whether the CCL and the remote are using compatible or incompatible data formats. If the CCL and the remote are using incompatible data formats, then the SMA converts the data. As will be apparent to one skilled in the art, the conversion from one data format into another can be managed in any suitable way, e.g., through multiple bi-directional translators 205.

Exemplary Communications Methods

FIG. 3 and FIG. 4 are flow diagrams illustrating exemplary communication methods of the present invention. These figures illustrate the communication methods utilized to transfer data between the customer central location (CCL) 100 and the remote locations (123, 124, 125, and 126) of FIG. 1. The communication methods of FIG. 3 and FIG. 4 allow the remote locations (123, 124, 125, and 126) and CCL 100 to communicate, even though they are connected by multiple wireless (e.g. digital cellular and PCS) systems using multiple, otherwise incompatible protocols or data formats. In discussing the following flow diagrams, reference will be made to the elements of FIG. 1.

FIG. 3 is a flow diagram illustrating the communications method 300 used by the CCL 100 to transfer data to a remote location (123, 124, 125, or 126). Communications

method 300 begins at step 302 and proceeds to step 304. At step 304, the CCL 100 transports the data to SMA 104. The SMA 104 at step 306 receives the data and retrieves the MIN, or other identifying characteristic, transported with the data. At step 308,
5 the SMA 104 uses the MIN to retrieve the CCL's profile 130 from the SMA database 128.

From the profile 130, the SMA 104 determines the MSC (109, 110, 117, or 119) that is serving the remote radio (113, 114, 121 or 122) identified by the MIN, the wireless access method
10 or data format used in the MSC's market, the class of service or data format used by the CCL, and the method of transport to use between the SMA 104 and the selected MSC (109, 110, 117, or 119), in step 310. In step 311, the SMA determines whether the data formats used by the CCL and the remote are compatible. If the
15 data formats are compatible, then the Yes branch is followed to step 313. However, if the data formats are not compatible, then the No branch is followed to step 312. At step 312, the SMA 104 converts the data to the proper format.

At step 313, the SMA transports the data to the
20 appropriate MSC (109, 110, 117, or 119) using the method of transport specified in the database. Proceeding to step 314, the MSC (109, 110, 117, or 119) receives and transports the data to the radio (113, 114, 121, or 122) associated with the remote location (123, 124, 125, or 126). Communications method 300 then
25 proceeds to step 316. At step 316, the radio (113, 114, 121, or 122) receives the converted data and transports it to the remote location (123, 124, 125, or 126). Finally, communications method 300 proceeds to step 318 and the method ends.

Figure 4 is a flow diagram illustrating an exemplary remote communications method 400 used by the remote locations (123, 124, 125, or 126) to transfer data to the CCL 100. The remote communications method 400 illustrates the steps used by a remote location (123, 124, 125, or 126) to transport data to the CCL 100. Remote communications method 400 begins at step 402 and proceeds to step 404. At step 404, the remote location (123, 124, 125, or 126) commands its radio (113, 114, 121, or 122) to send data to its associated MSC (109, 110, 117, or 119). At step 406, the MSC (109, 110, 117, or 119) receives the data and transports it to the SMA 104.

The remote communications method 400 then proceeds to step 408. At step 408, the SMA 104 receives the data and retrieves the identifying characteristics, such as the MIN (or IMSI) and MSC identifier (MSCID), from the data. The SMA 104 searches the SMA database 128 using the MIN and MSCID that the MSC (109, 110, 117 or 119) transported with the data. Next, at step 410, the SMA 104 determines from the SMA database 128: 1) the CCL identifier; 2) the class of service used by the identified CCL 100; and 3) the wireless access method used by the MSC.

The SMA compares the class of service used by the CCL and the wireless access method used by the MSC to determine whether the data formats are compatible in step 411. If the data formats are compatible, then the Yes branch is followed to step 413. However, if the data formats are incompatible, then the No branch is followed to step 412 and the data is converted. Once the data is converted, the method proceeds to step 413. In step 413, the SMA delivers the data to the CCL. The SMA delivers the data to the CCL using a transmission path that is appropriate for the CCL identified

by the CCL identifier. Then, remote communications method 400 proceeds to step 414 and ends.

Exemplary Communications

5 The following examples are exemplary communications supported by the present invention. These examples are intended to illustrate some of the possible communication schemes, between the CCL 100 and the remote locations (123, 124, 125, and 126), that may be implemented with the present invention. These examples
10 are in no way intended to limit the scope of the invention. Those skilled in the art will appreciate that there are many other possible schemes and protocols that may be implemented with the present invention.

 In a first example, the CCL 100 sends data to the
15 remote location 123. The remote location 123 is associated with an AMP's radio 113 and the AMP's radio is served by MSC 109. The CCL's class of service is "CELLEMETRY" Data Service. The CCL 100 sends the MIN of the AMPS radio 113 along with the data to be transported to the SMA 104. The SMA 104 determines from the
20 SMA database 128 that the MIN corresponds to the AMP's radio 113; the class of service is "CELLEMETRY" Data Service; and the MSC 109 serves the radio 113.

 Depending on the type of mobile switching center, either an IS41 inter system page message is sent from the SMA 104
25 to the MSC 109 through data circuit 105, the SS7/IS41 network 106 and the data circuit 108; or a roamer-access call is made from the SMA 104 to the MSC 109 through circuit 103, public voice/data transport 102 and the data circuit 111. The SMA determines the appropriate method of transport between the SMA 104 and the MSC

109 from the database 128. The MSC 109 then broadcasts a page order, which is received by the AMPS radio 113 and delivered to the remote location 123 to complete the transaction.

In another example, the remote location 123 sends data to the CCL 100. The remote location 123 is associated with the AMP's radio 113 and the AMP's radio is served by MSC 109. The remote location 123 sends a message to the CCL 100 by commanding the AMPS radio 113 to generate a regeneration notification that is received by the MSC 109. The MSC 109 then forwards the regeneration notification to the SMA 104, via the data circuit 108, the SS7/IS41 network 106 and the data circuit 105. Once the SMA 104 receives the notification, the SMA 104 searches the SMA database 128, using the MIN and the MSCID provided by the MSC 109. From the database 128, the SMA 104 determines the following: 1) the CCL identifier for the intended recipient; 2) the class of service used by the CCL; and 3) and the wireless access method used by MSC 109. The SMA 104 compares the class of service used by the CCL 100 and the wireless access method used by MSC 109 to determine whether the data needs to be converted. If so, the SMA 104 converts the data. The data is delivered to the CCL 100 using the data circuit 103, public voice/data transport 102 and the data circuit 101.

In a further example, the CCL 100 sends data to the remote location 125. The remote location 125 is associated with a TDMA radio 121 and the TDMA radio is served by MSC 117. The CCL 100 sends the MIN of the TDMA radio 121 along with the data to the SMA 104. The SMA 104 determines from the SMA database 128 that the MIN corresponds to the TDMA radio 121; short message system (SMS) is the class of service; the MSC 117 serves

along with the data to be transported to the SMA 104. The SMA 104 determines from the SMA database 128 that the MIN corresponds to the CDMA radio 122; asynchronous digital data is the class of service; that the MSC 119 serves the CDMA radio 122; and that the method of transport from the SMA 104 to the MSC 119 is via data circuit 103 and public voice/data transport 102. Once this information is retrieved, a data message is sent from the SMA 104 to MSC 119. The message is sent through data circuit 103, public voice/data transport 102, and the data circuit 120. The data message is then sent by the MSC 119 to the CDMA radio 122, which in turn sends the data message to the remote location 126 to complete the transaction.

In a final example, the remote location 126 wishes to send data to the CCL 100. The remote location 126 is associated with a CDMA radio 122 and the CDMA radio is served by MSC 119. The remote location 126 requests that CDMA radio 122 initiate an asynchronous digital data call, which is received by the MSC 119 and transported to the SMA 104. The MSC 119 transports the data call via the data circuit 120, the public voice/data transport 102, and data circuit 103. The SMA 104 then searches the SMA database 128, using the MIN and the MSCID provided by the MSC 119, and determines: the CCL identifier for the intended recipient; the class of service used by the intended recipient; and the wireless access method used by the MSC 119. The SMA 104 compares the class of service used by the CCL 100 and the wireless access method used by the MSC 119 to determine whether the data needs to be converted. If so, the SMA 104 converts the data. The data is then delivered to the CCL 100 using the data circuit 103, the public voice/data transport 102 and the data circuit 101.

CLAIMS

What is claimed is:

5

1. A system for interconnecting a plurality of data communication devices, the system comprising:

a first data communication path for receiving a transmission from a first data communication device;

10

an arbitrator operative to automatically:

determine, from the transmission, an identity of a second data communication device,

15

determine, from the identity of the second data communication device, a selected one of a plurality of data formats that is expected by the second data communication device, and

convert the transmission into the selected data format determined from the identity of the second data communications device; and

20

a second data communication path for transmitting the transmission converted by the arbitrator to the second data communication device.

25

2. The system of claim 1, wherein each of the plurality of data communication devices has an identifying characteristic, and wherein the arbitrator is further operative to:

maintain a database that stores the identifying characteristics of each of the plurality of data communication devices;

retrieve the identifying characteristic of the first data communication device from the transmission received; and

search the database with the identifying characteristic of the first data communication device to determine the identity of the second data communication device.

3. The system of claim 2, wherein the database stores a data format expected by each of the plurality of data communication devices, and wherein the arbitrator is further operative to search the database using the identifying characteristic of the first data communication device to determine the data format expected by the second data communication device.

4. The system of claim 1, wherein each of the plurality of data communication devices has an identifying characteristic, and wherein the arbitrator is further operative to:

maintain a database that stores the identifying characteristics of each of the plurality of data communication devices;

retrieve the identifying characteristic of the second data communication device from the transmission received; and

search the database with the identifying characteristic of the second data communication device.

5. The system of claim 4, wherein the database stores a method of transport to each of the plurality of data communication devices, and wherein the arbitrator is further operative to:

search the database with the identifying characteristic of the second data communication device to determine the method of transport to the second data communication device; and

5 transmit the transmission that is converted into the data format that is expected by the second communication device using the method of transport determined for the second data communication device.

10 6. The system of claim 1, wherein at least one of the first and second data communication devices is a wireless device, and wherein at least one of the first and second data communication paths is a data communication path for communicating with the wireless device.

15 7. The system of claim 1, wherein the first data communication device uses a first data format and the second data communication device uses a second data format which is incompatible with the first data format, and wherein the arbitrator
20 is further operative to convert the transmission from the first data format to the second data format.

 8. The system of claim 1, wherein the data format is selected from the group comprising time division multiple access,
25 code division multiple access and global system for mobile telecommunications.

5

5

5

10

10

10

15

15

20

20

25

25

devices, whereby the arbitrator retrieves the identifying characteristic of the first data communication device from the first data transmission and searches the database with the identifying characteristic of the first data communication device to determine
5 the identity of the third data communication device.

11. The system of claim 10, wherein the database stores the data format expected by each of the plurality of data communication devices and the arbitrator searches the database with
10 the identifying characteristics of the first data communication device to determine the data format expected by the third data communication device.

12. The system of claim 10, wherein the arbitrator is
15 further operative to compare the data format expected by the third data communication device with a data format used by the first data communication device.

13. The system of claim 10, wherein at least one of
20 the first and second data communication devices is a wireless device.

5 comprising:

method;

10

data communication device;

15

the central data communication device.

20

15. The method of claim 14, further comprising:

access method;

25

communication device and a data format expected by the central

transmitting the converted second transmission to
5 the central data communication device.

using the first MSCID, along with the first MIN,
to determine whether the first wireless access method and the data
format expected by the central data communication device are
compatible.

17. The method of claim 14, further comprising:
receiving a third transmission from the central
data communication device;
20 retrieving the first mobile identification number
(MIN) from the third transmission;
using the first MIN to identify the first remote
communication device and the first wireless access method
associated with the first remote data communication device; and
25 transmitting the third transmission to the first
remote data communication device.

5

10

using the first MIN to access a database maintained by an arbitrator.

INTERCONNECT SYSTEM AND METHOD FOR MULTIPLE
PROTOCOL SHORT MESSAGE SERVICES

5

ABSTRACT OF THE INVENTION

A customer central location (CCL) communicates with multiple remote wireless devices employing mutually incompatible data formats or short message service (SMS) protocols. A communication, from the CCL to a remote device or from a remote device to the CCL, passes through a short message arbitrator (SMA), which determines the identifying characteristic(s) of the device receiving the communication. From the identifying characteristic(s), the short message arbitrator determines the expected data format and the transmission path to the device. The SMA converts the communication into the expected data format and transmits the communication over the appropriate transmission path.

20

25

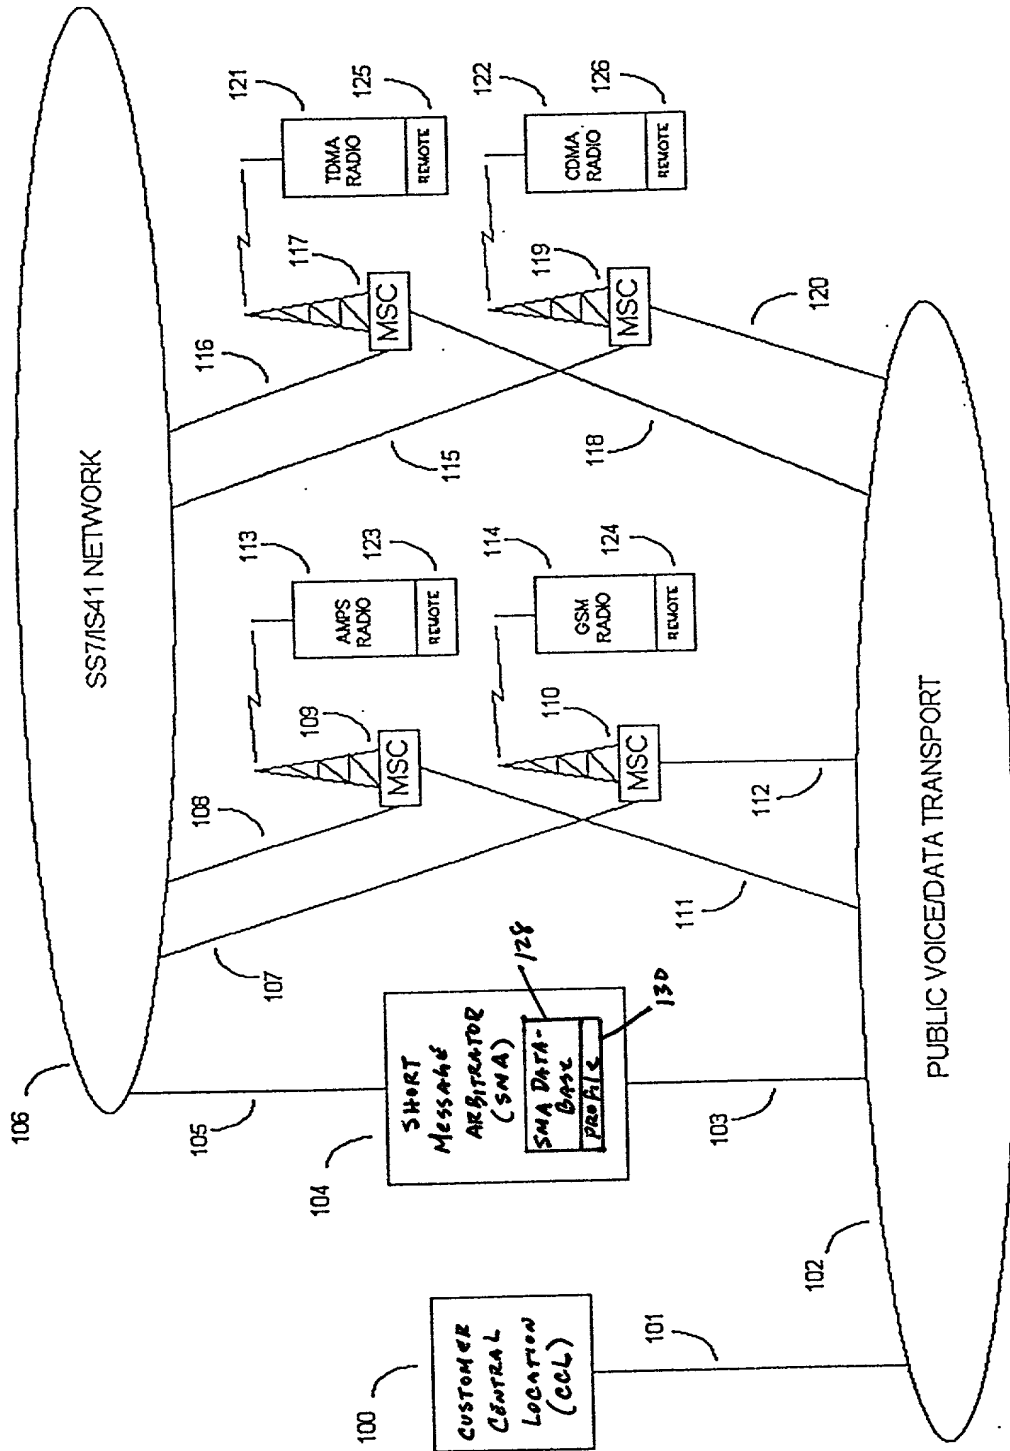


Fig. 1

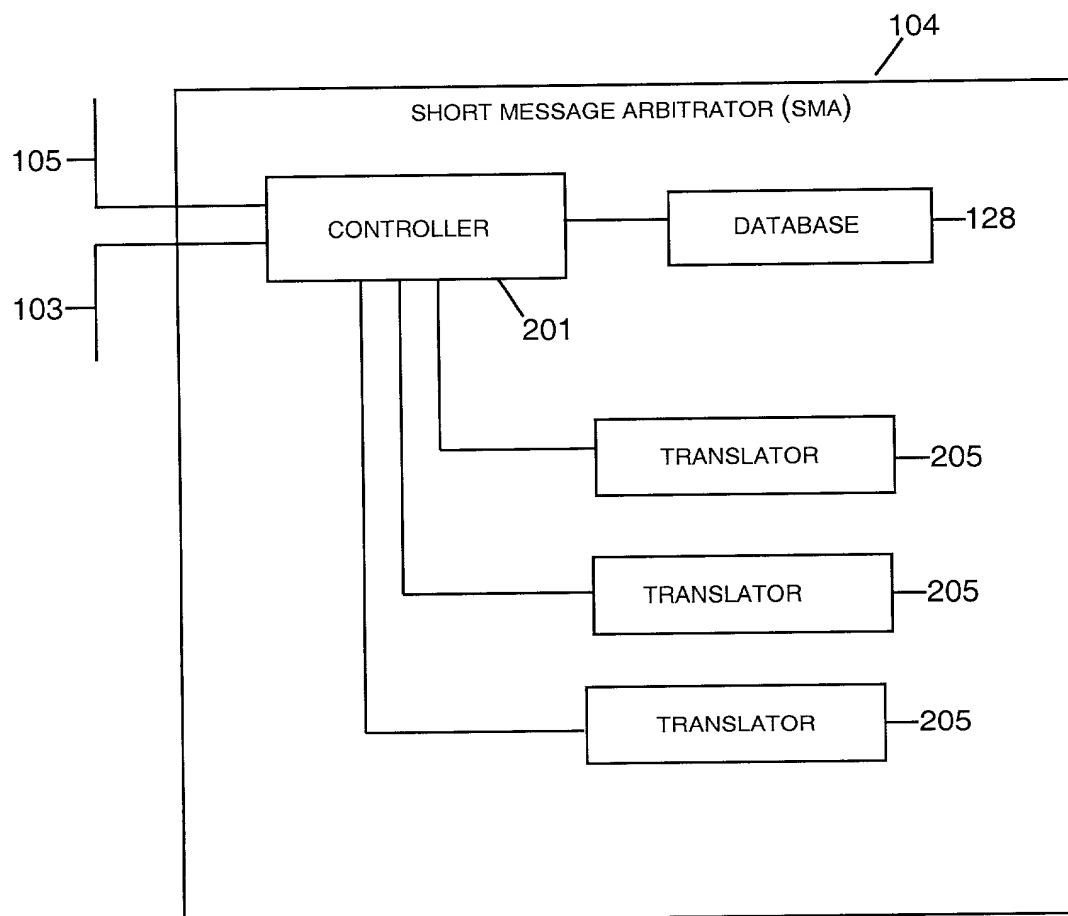


FIG. 2

CCL COMMUNICATIONS METHOD

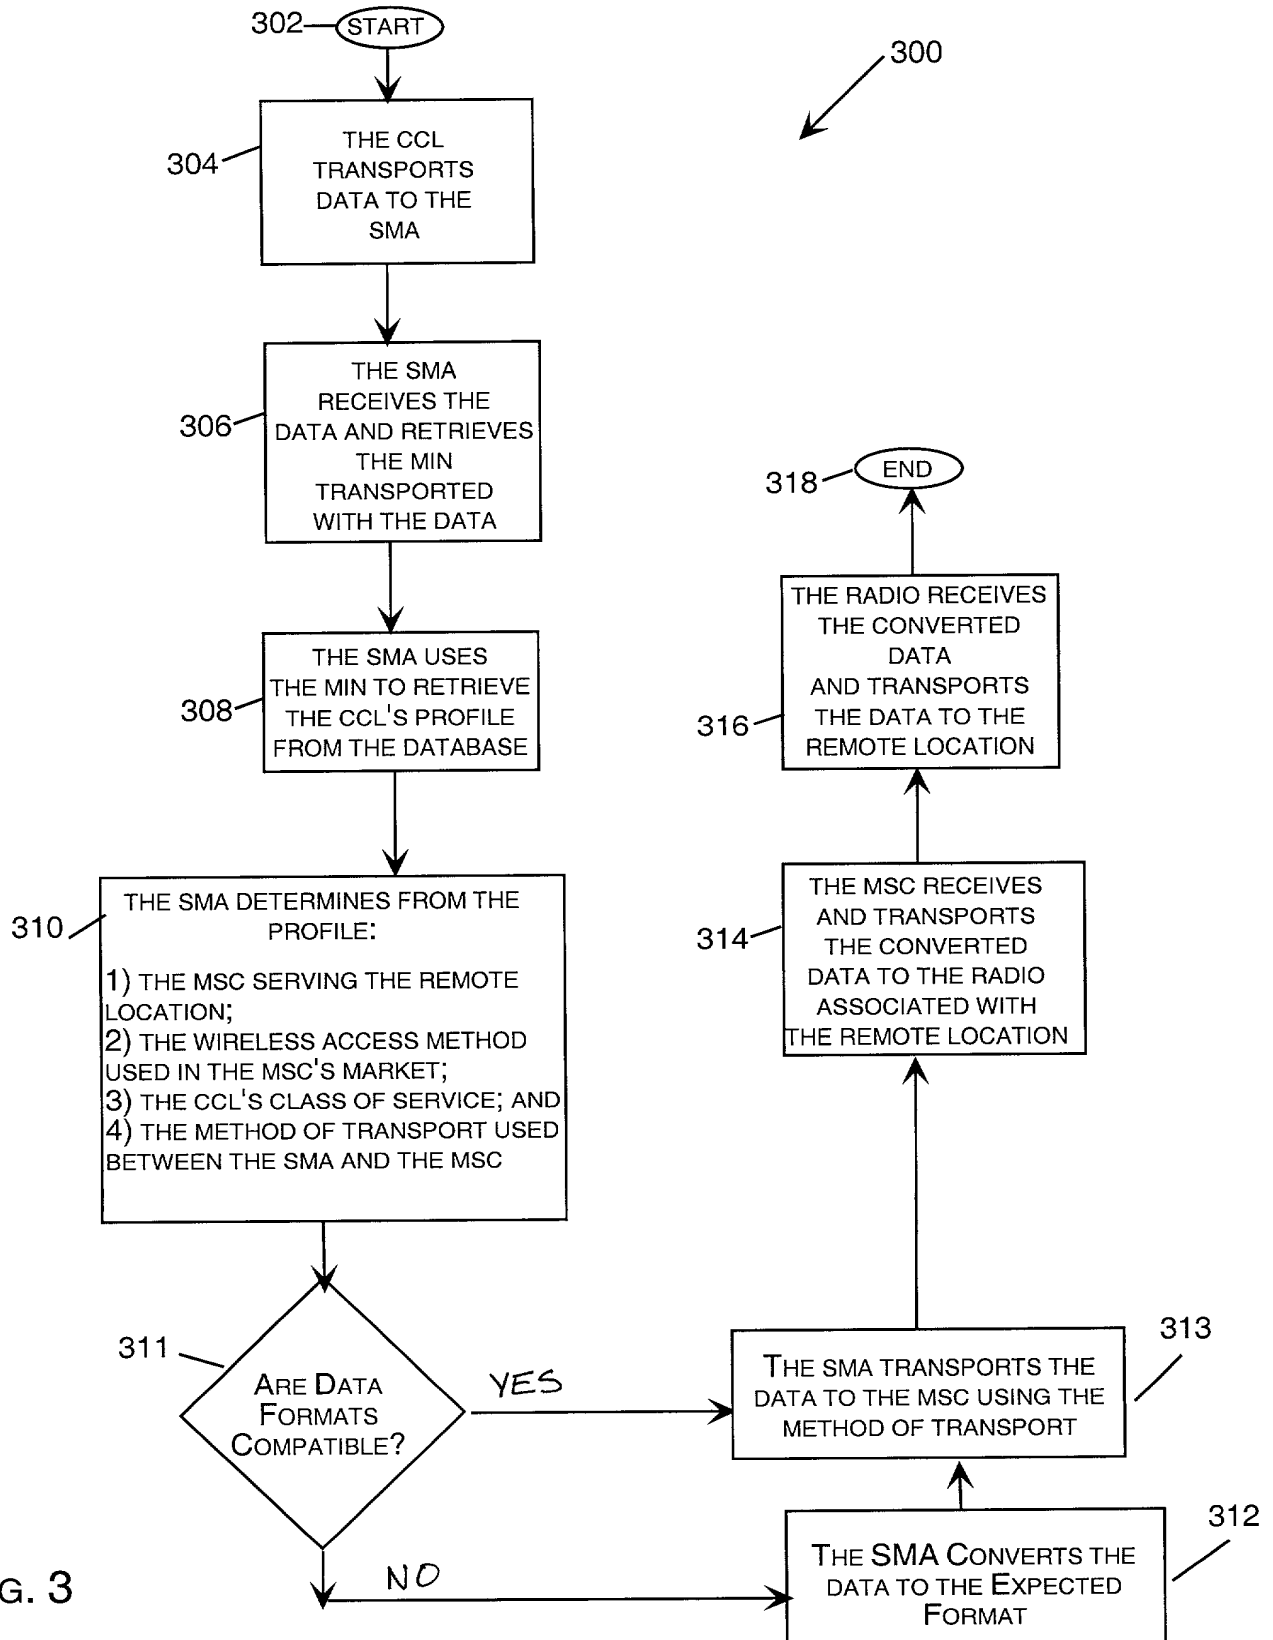


FIG. 3

REMOTE COMMUNICATIONS METHOD

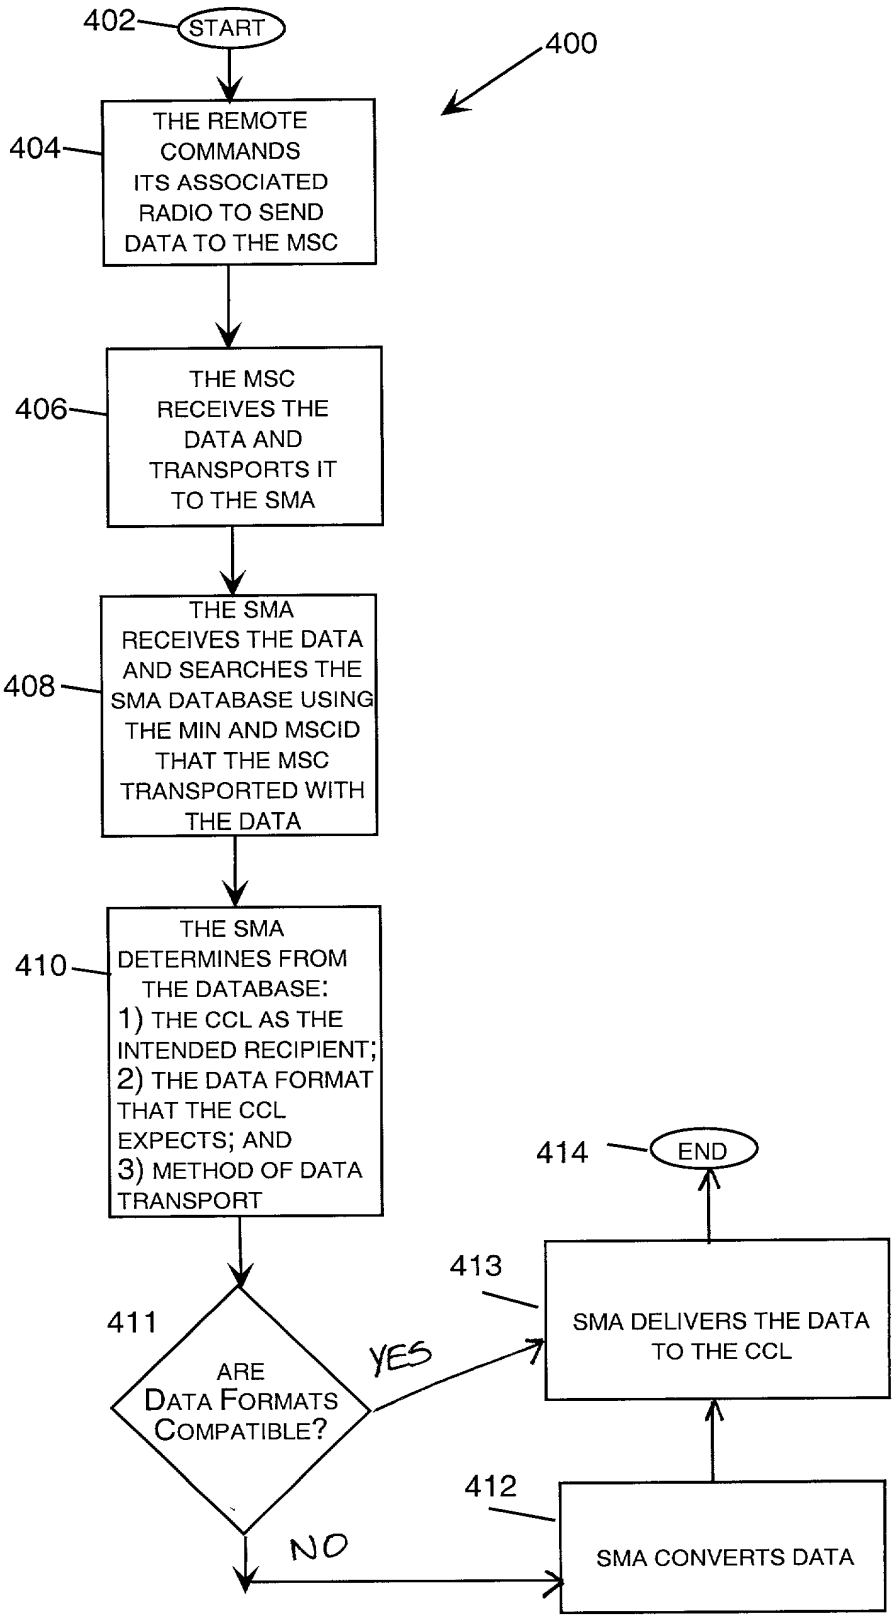


FIG. 4